



ME 102 ME 104

Quick Guide
 Kurzanleitung
 Guide de démarrage rapide
 Guida rapida
 Instrucciones resumidas
 Instruções resumidas
 Beknopte gebruiksaanwijzing
 Krótka instrukcja obsługi
 Snabbguide

Kort vejledning
 Pikaohje
 Γρήγορος οδηγός
 Kısa Kılavuz
 Краткая инструкция
 快速指南
 快速使用指南
 クイックガイド
 퀵 가이드

SENNHEISER




www.sennheiser.com/download

Sennheiser electronic GmbH & Co. KG


Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 12/23, 583975/A03


In the box

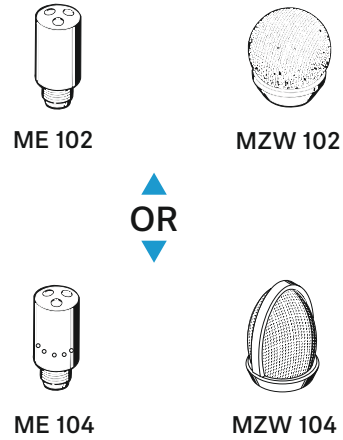

Setup

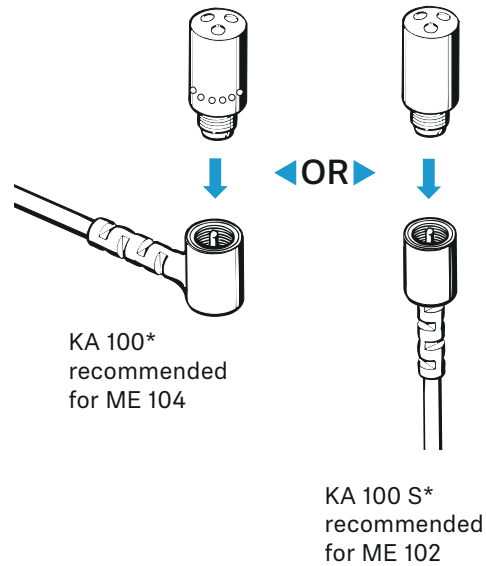

System overview

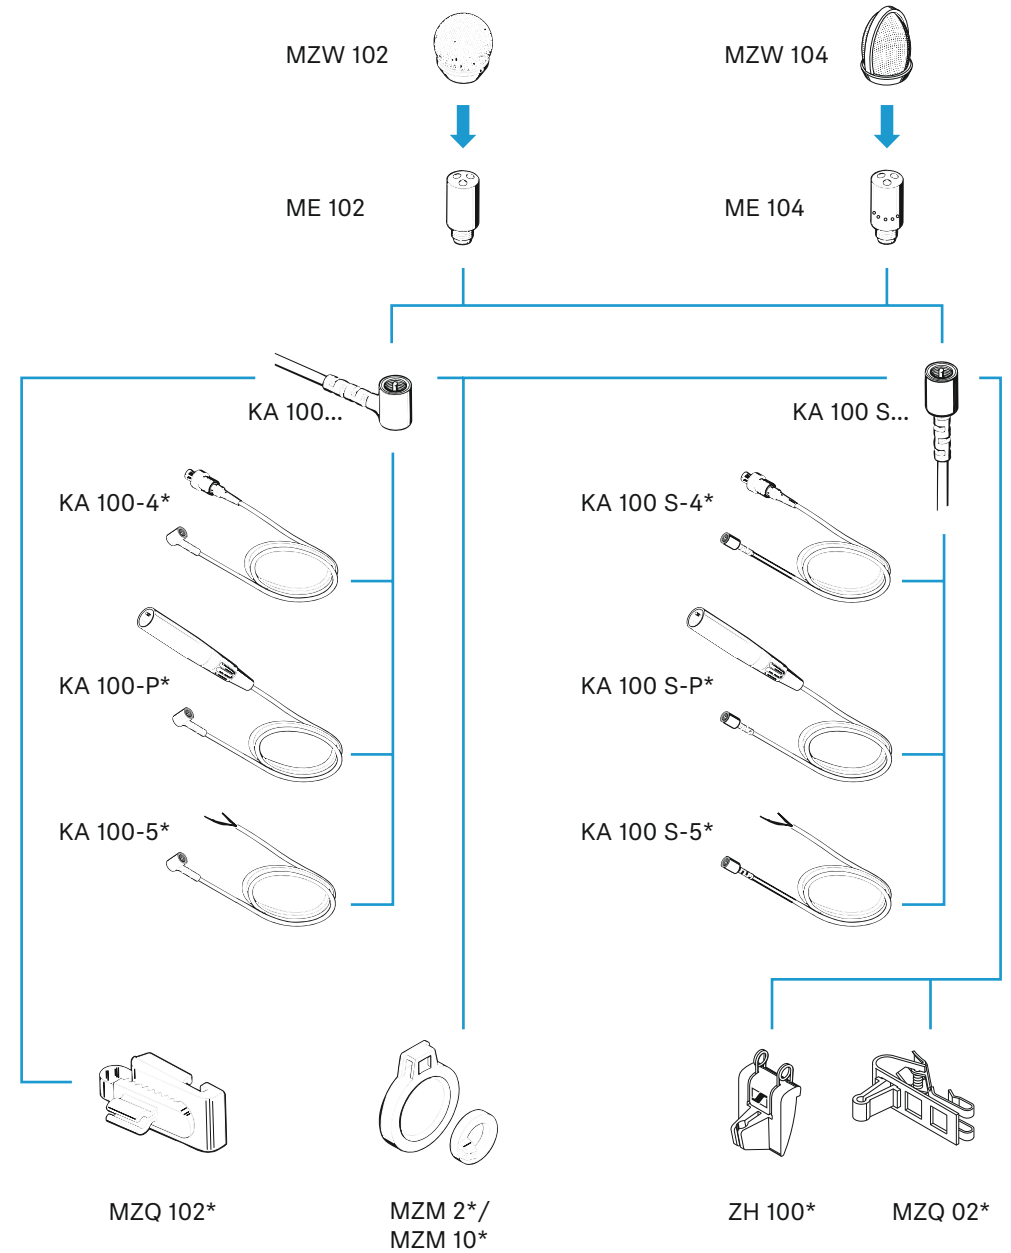


* optional accessories

Specifications

| | ME 102 | ME 104 |
|--|-------------------|-------------------|
| Pick-up pattern | omni-directional | cardioid |
| Frequency response | 40 – 20,000 Hz | 100 – 20,000 Hz |
| Sensitivity (free field, no load) at 1 kHz | 10 mV/Pa ±2.5 dB | 8 mV/Pa ±2.5 dB |
| Nominal impedance | 50 Ω | 50 Ω |
| Min. terminating impedance | 1 kΩ | 1 kΩ |
| Equivalent noise level | | |
| A-weighted | 21 dB | 38 dB |
| CCIR-weighted | 33 dB | 30 dB |
| Max. SPL (1 kHz) | 127 dB (THD = 1%) | 133 dB (THD = 1%) |
| Supply current | 2.6 mA | 2.6 mA |
| Dimensions | ∅ 6 x 9 mm | ∅ 6 x 9.5 mm |
| Weight (without cable) | 1 g | 1 g |


Polar pattern and frequency response

ME 104

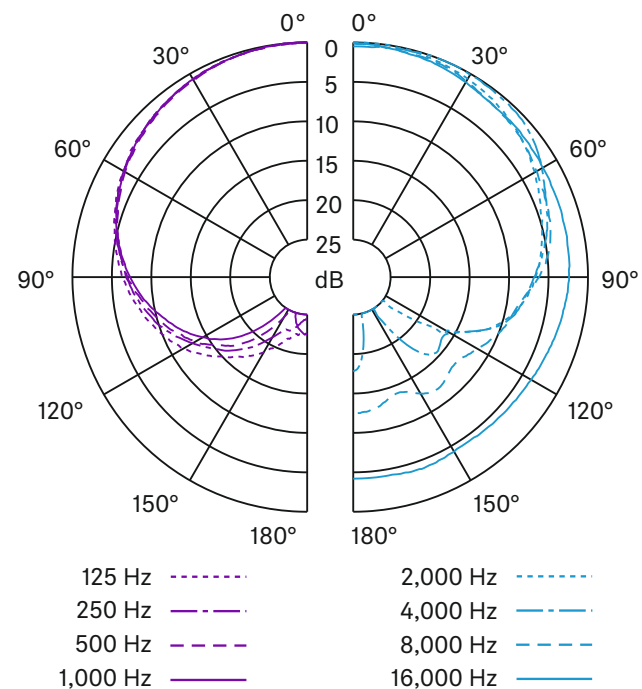


Accessory


MZQ 102*

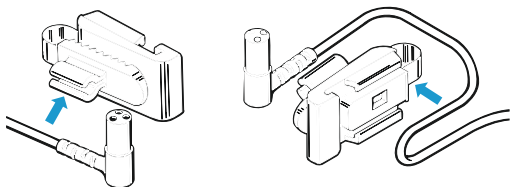


MZM 2* /
MZM 10*



MZQ 02*

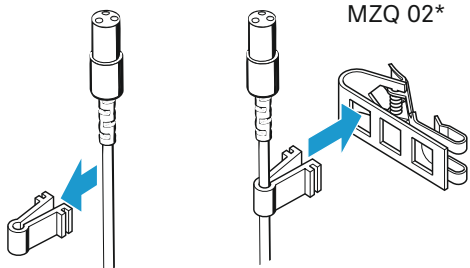


ZH 102*



* optional accessories

ME 104

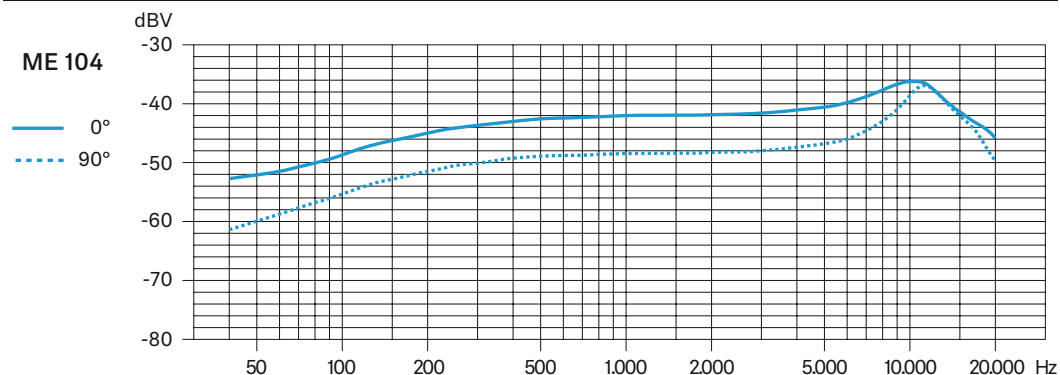

ME 102

