


DeckLink Micro Recorder



\$165

The DeckLink Micro Recorder is a low-latency miniature video capture card for all SD and HD formats up to 1080p30. Compatible with computers that have a 1-lane Gen 1 Mini PCIe slot, SDI or HDMI video inputs can be added using the built in Hirose® and Molex® connectors.

Connections

PCIe Gen 1

PCI Express® Mini Card

Electromechanical Specification.

Note, however, that the HDMI connector height (8.0mm) exceeds the 3.0mm height specification.

Standards

SD Format Support

525i/59.94 NTSC, 625i/50 PAL.

HD Format Support

720p50, 720p59.94, 720p60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080i50, 1080i59.94, 1080i60, 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30.

Video Sampling

4:2:2.

Color Precision

8, 10-bit YUV 4:2:2.

Compliance

SMPTE 259M, 292M, 296M, and HDMI.


Available Accessories

HDMI Cable



7.55 in

SDI Cable



5.94 in


Part Numbers

DeckLink Micro Recorder, order code: BDLKMICROREC

HDMI Cable, order code: CABLE-BDLKMIR/HDMI

SDI Cable, order code: CABLE-BDLKMIR/SDI

Physical Specifications

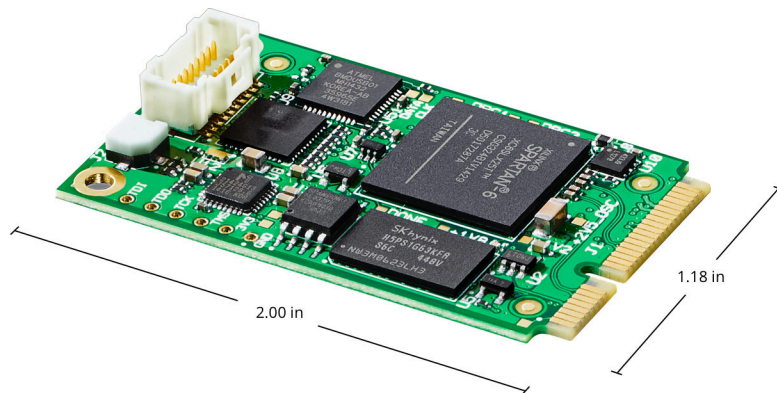

Operating Systems



Mac 14.0 Sonoma,
Mac 15.0 Sequoia or later.



Windows 10, 64-bit.
Windows 11.



Linux

Power Requirements

Power Consumption

3 W max

Environmental Specifications

Operating Temperature

-25°C to 55°C (-13°F to 131°F)

Storage Temperature

-40°C to 75°C (-40°F to 167°F)

Relative Humidity

0% to 90% non-condensing

What's Included

DeckLink Micro Recorder

Warranty

3 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2025, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller